

COMET HIGH PRESSURE REGULATOR



COMPLETE
WITH SAFETY
FEATURES

- ✓ SAFETY LOCK
- ✓ ENHANCED GRIP
- ✓ ADJUSTABLE PRESSURE



23, Jalan Gitar 33/3, Elite Industrial Park, Seksyen 33, 40350, Shah Alam, Selangor Darul Ehsan, Malaysia.



03-5525 8287
012-410 3287



sales@comet-integrated.com
www.comet-integrated.com

Safety Features

Safety Lock

Once installed, the regulator cannot be removed without pressing the release button to ensure regulator remains in secured position.

Enhanced Grip


A tight grip will securely lock the regulator in place, reducing chances of leakage.

Adjustable Pressure Knob

Pressure can be adjusted up to 2 Bar simply by rotating the knob.

Suitable for Malaysia

Can be fitted on standard Malaysian gas cylinder.

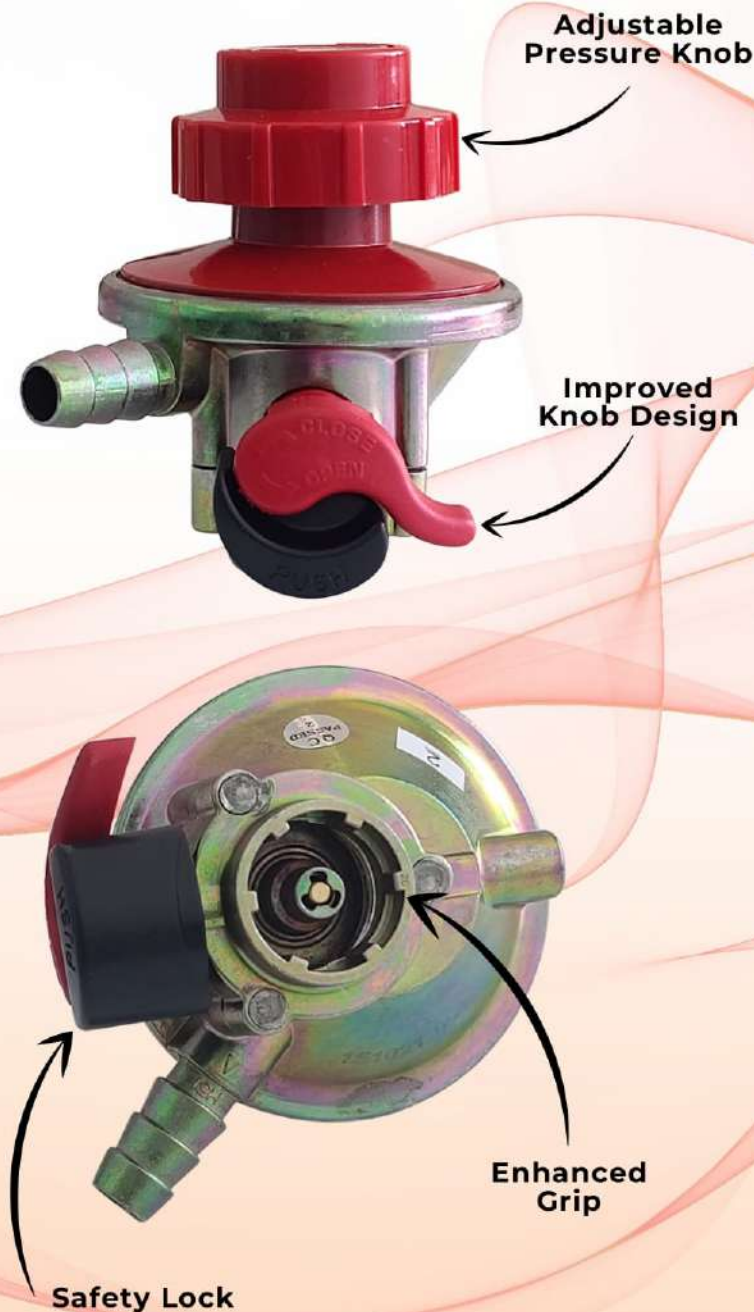

Technical Details

Inlet Connection	20mm
Pressure	0 - 2 Bar
Capacity	6kg/hr


Installation Method

1)




To install, place the regulator over the gas cylinder and press downwards firmly until you hear it clicking into position

2)



Follow the arrow guidelines to open / close the regulator.

3)

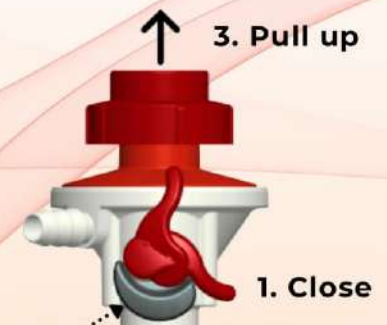

2. Push in

To release, push in the release button and pull up the regulator.