


# solimar DUAL-STAGE REGULATOR

## 8632 DUAL-STAGE REGULATOR




### APPLICATION

Integral Two-Stage units integrate first-stage regulator and second-stage regulator into a single compact unit. They are highly recommended for installations where the distance between the building being served and the tank is relatively short

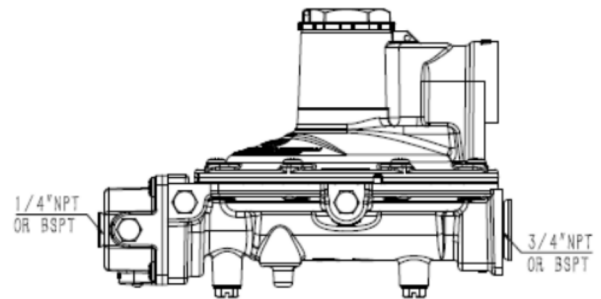

### FEATURES

- Type: Integral Two Stage Regulator
- Body: Die Cast Aluminum
- Diaphragm: NBR Molded O-RING
- Orifice Size: 0.219"

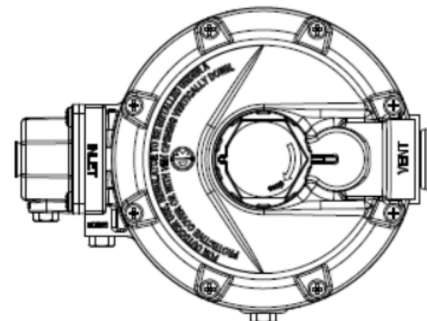

### PRODUCT SPECIFICATION

Model	Inlet Connection	Outlet Connection	Inlet Pressure	Outlet Pressure	Flow rate capacity
8632	1/4" NPT	3/4" NPT	max 200 psi	23-37 mbar	950,000 btu/h 20 kg/h