

COMET 628H HIGH PRESSURE GAS REGULATOR



COMPLETE WITH
SAFETY
FEATURES



SAFETY LOCK



ENHANCE GRIP



ADJUSTABLE PRESSURE

23, Jalan Gitar 33/3, Elite Industrial Park, Seksyen 33, 40350, Shah Alam,
Selangor, Malaysia



+603 5525 8287
+6012 410 3287



sales@comet-integrated.com
www.comet-integrated.com

Safety Features

Safety Lock

Once install, the regulator cannot be removed without pressing the release button to ensure regulator remains in secure position.

Enhanced Grip

A tight grip will securely lock the regulator in place, reducing chances of leakage.

Adjustable Pressure Knob

Pressure can be adjusted up to 2 Bar simply by rotating the knob.

Suitable for Malaysia

Can be fitted on standard Malaysian gas cylinder.



Technical Details


Inlet Connection	20mm
Pressure	0 - 2 bar
Capacity	6kg/hr

1.




To adjust, place the regulator over the gas cylinder and press downwards firmly until you hear it clicking into position.

2.

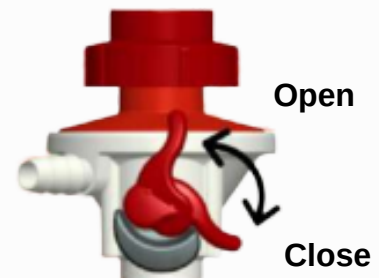

Follow the arrow guidelines to open/close the regulator.

3.

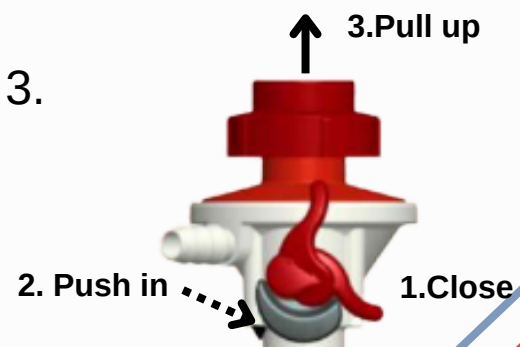

To release, push in the release button and pull up the regulator.